

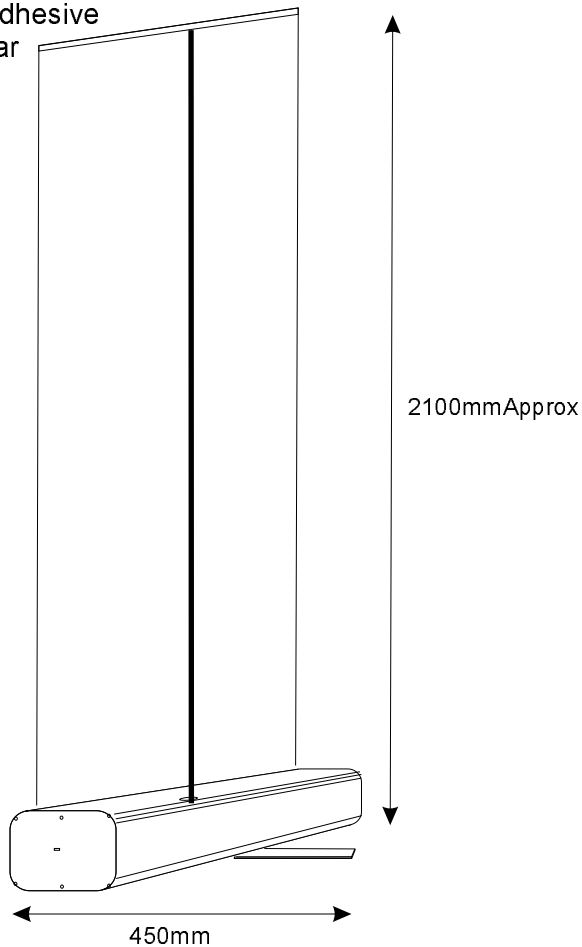


self adhesive
top bar

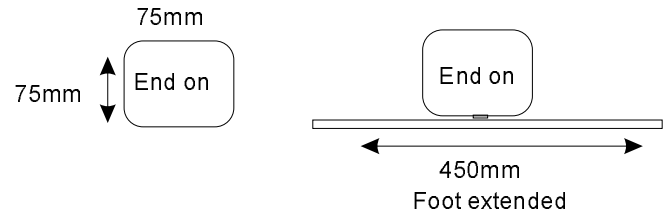

Eco-ROLLA

Specifications

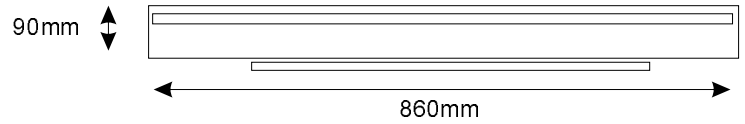

Weight eco-ROLLA 4.5kg

Base dimension

NOTES / INSTRUCTIONS

****Double sided tape is not suitable for all substrates.(for example PVC). Check your materials suitability before use.**

****Do not remove the pin until you have attached you graphics as described below**

Fitting graphics

Remove unit from bag.


1. Attach your graphic panel to the double side tape on the graphic leader which is sticking out of the unit. Clean your graphic carefully and press hard to the double sided tape. For the glue to set and harden we recommend leaving the unit for 24 hours before use.

2. Remove double sided tape from top rail and follow instruction 1 above.

3. Once attached hold the graphic and remove the locking pin sticking out from the side of the unit. Removing the pin will release the spring. Let the graphic slowly roll into the cassette.

Replacing graphics

1. Pull the graphic out of the unit until you see where the graphic joins graphic leader. Replace the locking pin into the side of the cassette. (You may need to adjust the the graphic until the unit lines up) Once pin in place peel the graphic off the leader.

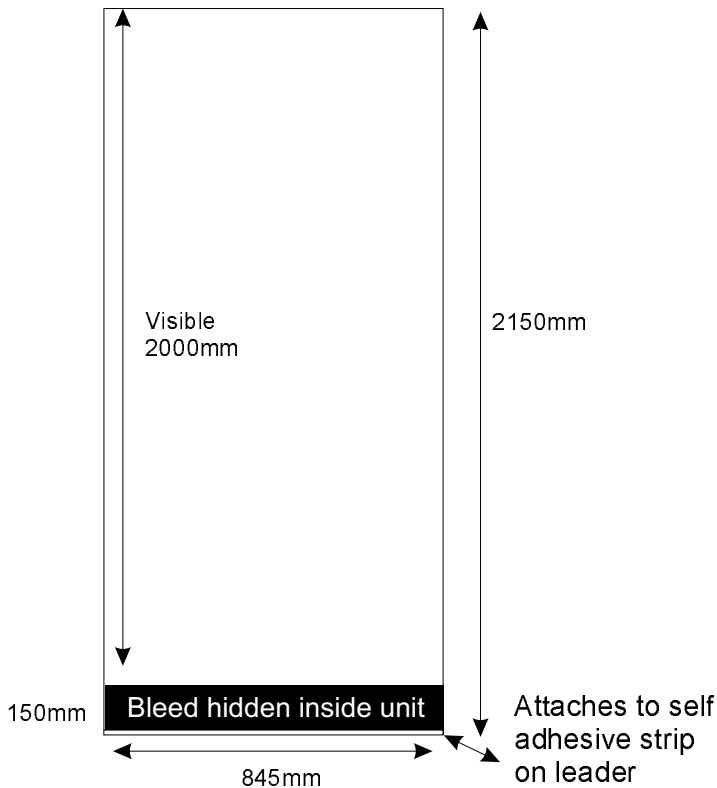

Graphic sizes

EXPOLITE

With so many different substrates on the market any advice given on materials is for guidance only. The compatibility of substrates with expolite hardware must be determined by the purchaser.